

Little Giants and Octopus
Washing, drying and ironing



+brandplus
+powerplus
+formplus
+comfortplus
+careplus
+flexplus
+volumeplus

The Miele added value



WashPlus DryPlus FinishPlus

WashPlus, DryPlus and FinishPlus represent perfectly synchronised laundry machines, which fulfil the demands of the most diverse operators with the utmost in quality, flexibility, product utility and responsibility.

+volumeplus

A capacity that defines its size.

+careplus

A system that provides gentle laundry care.

+powerplus

A performance that offers more.

+ecoplus

A sustainable, cost-effective performance.

+flexplus

A process that adapts to all situations.

+comfortplus

A simple, user-friendly solution.

+formplus

A concept that leaves a lasting impression.



reddot design award
winner 2010

+brandplus

A strong brand.

Versatile choice of programmes and capacities for a wide range of applications



PROFILINE series

The **PROFILINE** series represent a range of entry-line products for the commercial laundry care market.

See page 4

PROFESSIONAL series

Offering a large selection of special and add-on programmes, the **PROFESSIONAL** series meets the most demanding requirements in commercial laundry care applications.

See page 6

OCTOPLUS series

On the **OCTOPLUS** range, all the programme options from the **PROFILINE** and **PROFESSIONAL** series come as standard. The washing machines has 72 standard and special-purpose programmes. The dryer, offering 42 programmes, meets even the most exacting requirements for perfect laundry finish.

See page 8

The **ProfiLine**, **Professional** and **Octoplus** ranges are ideal for thorough and effective laundry care for the following target groups:

- Residential care homes
- Nursing homes
- Hairdressers
- Beauty salons
- Sport clubs
- Schools
- Conference centres
- Hotels and restaurants
- Housing associations
- Student accommodation
- Dry cleaners
- Fitness studios
- Holiday homes
- Households with large quantities of laundry

Little Giants washer-extractors and tumble dryers, load capacity 6.5 kg, ProfiLine controls



Illustration shows PW 5062 with PT 5135 C

PW 5062 washer-extractor

- Load capacity 6.5 kg
- Controls ProfiLine B Plus
- Honeycomb drum, 59 l capacity
- Spin speed 1400 rpm
- g factor 526, residual moisture 49%

Casing

- White with stainless steel lid



PT 5135 C tumble dryer

- Condenser dryer
- Load capacity 6.5 kg
- ProfiLine L controls
- Honeycomb drum, 130 l capacity

PT 5136 tumble dryer

- Vented dryer
- Load capacity 6.5 kg
- ProfiLine L controls
- Honeycomb drum, 130 l capacity

Casing

- White with stainless steel lid

Interfaces and connection options

- Optical interface for service diagnosis and programme updates
- 7-pole interface for payment systems
- 4 dispensing signals with container empty input signal
- RS 232 communication slot and interface module optional



*In the PT 5136 tumble dryer

NEW with the Little Giants: 60% energy saving with the PT 5137 WP heat-pump tumble dryer



New from
MIELE

PT 5137 WP heat-pump tumble dryer

- Heat-pump tumble dryer system
- Load capacity 6.5 kg
- ProfiLine L controls
- Honeycomb drum, 130 l capacity
- Up to 60% energy saving, 1.55 kWh energy consumption

Casing

- White with stainless steel lid



+ecoplus

A sustainable, cost-effective performance.

New from
MIELE

Heat-pump

The technology of the future

Like all Miele Professional tumble dryers, the Miele Professional heat-pump tumble dryer offers many valuable benefits. Besides especially gentle laundry drying, the heat for the PT 5137 WP is generated by a heat-pump, which brings the dry air to the required temperature level.

The dryer handles energy so sparingly that energy savings of approx. 60% can be achieved in comparison to a conventional condenser dryer. For example, the 'Normal dry' programme uses just 1.55 kWh of energy per drying cycle – for active environmental protection. Thanks to the especially high-performance heat-pump and the intelligent drying process, it takes just a short amount of time to perfectly dry even large quantities of laundry.

+careplus

A system that provides gentle laundry care.

Optimal care

The patented Miele honeycomb drum, the Sensitive system and the new SoftLift ribs all ensure that the laundry is perfectly cared for during the drying process. In addition, the low temperatures used during the drying process in the heat-pump tumble dryer mean that even sensitive textiles are dried in an especially gentle manner.

An effective and environmentally friendly principle

The heat-pump tumble dryer functions using 2 closed cycles: the process air cycle and the refrigerant cycle. The process air is heated up and absorbs the moisture contained in the textiles^{①②} The condenser^③ condenses the water contained in the air. The condensate is pumped out and the residual heat is used to supply the second closed cycle – the refrigerant cycle – with energy via a liquefier^{④⑤}. The air which has been warmed in this manner is then directed back into the drum by the process air fan, and the air cycle begins anew.

Little Giants washer-extractors and tumble dryers, load capacity 5.5 - 6.5 kg, Profitronic L Vario controls



Illustration shows PW 6065 Vario with PT 7135 C Vario

PW 6055 washer-extractor

- Load capacity 5.5 kg
- Profitronic L controls
- Honeycomb drum, 54 l capacity
- Spin speed 1400 rpm
- g factor 526, residual moisture 49%

Casing

- White with stainless steel lid



PW 6065 Vario washer-extractor

- Load capacity 6.5 kg
- Profitronic L Vario controls
- Honeycomb drum, 59 l capacity
- Spin speed 1400 rpm
- Direct-access keys
- g factor 526, residual moisture 49%

Casing

- White or stainless steel



PT 7135 C Vario tumble dryer

- Condenser dryer
- Load capacity 6.5 kg
- Profitronic L Vario controls
- Honeycomb drum, 130 l capacity
- Direct-access keys

PT 7136 Vario tumble dryer

- Vented dryer
- Load capacity 6.5 kg
- Profitronic L Vario controls
- Honeycomb drum, 130 l capacity
- Direct-access keys

Casing

- White or stainless steel



Interfaces and connection options

- Optical interface for service diagnosis and programme updates
- 7-pole interface for payment systems
- 6 dispensing signals with container empty input signal

COMPLIANT
WITH MACHINERY
GUIDELINE
2006/42/EC



Detailed product information including technical data can be found
in the Little Giants Brochure

Washer-extractors and tumble dryers, load capacity 5.5 - 10 kg: Profitronic L Vario controls

Modes of operation

Washer-extractors and tumble dryers

Little Giants 5.5 – 6.5 kg

Octoplus 8 – 10 kg



Programme selection concept: Standard



Programme selection concept: Direct-access buttons



Programme selection concept: Direct-access buttons and more

Illustration shows Profitronic L Vario controls
from the Octoplus range



A process that adapts to all situations.

Exclusive to
MIELE

Individual display design

PROFITRONIC L Vario controls facilitate customised programme selection on both washer-extractors and tumble dryers, allowing machines to adapt flexibly to commercial users' needs.

Programme selection concept: Standard

In 'Standard' mode, the operator has access to all programmes from the selected target group programme packages. Four programmes can be saved to the direct-access keys for quick selection. Other programmes can be accessed by selecting 'Further programmes'. The option of modifying programmes and programme parameters, e.g. temperatures, spin speeds, pre-wash, etc., to suit individual needs makes this control set particularly flexible. Thus specific requirements can be fulfilled to achieve perfect laundry care.

Programme selection concept: Direct-access buttons

This set of controls represents the simplest of user interfaces. Of all the programmes available, 4 are selected and saved. No further changes are possible on the part of the user.

The operator can, of course, reassign new programmes to pushbuttons at any time. This approach offers maximum safety and eliminates human error.

Programme selection concept: Direct-access buttons and more

In this mode, the laundry operator selects 12 programmes to be made available to users. The first 3 programmes are visible in the display and can be selected using direct-access buttons 1-3. The fourth button calls up a list containing 9 further programmes. This type of interface ideally combines safe and simple selection with access to a broader range of programmes.

In addition to the 'Standard' and 'Direct access' user interfaces on washer-extractors, PROFITRONIC L Vario controls on tumble dryers offer 2 additional programme selection concepts for operation via payment systems.

Octopus washer-extractors and tumble dryers, load capacity 8 kg, Profitronic L Vario controls



PW 6080 Vario washer-extractor

- Load capacity 8 kg
- Profitronic L Vario controls
- Honeycomb drum, 80 l capacity
- Spin speed 1300 rpm
- Direct-access keys
- g factor 520, residual moisture 49%
- Operating mode: Electric

Casing

- Octoblue or stainless steel with Octoblue side panels



PT 7186 Vario tumble dryer

- Vented dryer
- Load capacity 8 kg
- Profitronic L Vario controls
- Honeycomb drum, 180 l capacity
- Direct-access keys
- Operating mode: Electric or gas

Casing

- Octoblue or stainless steel with Octoblue side panels

Interfaces and connection options

- Optical interface for service diagnosis and programme updates
- 7-pole interface for payment systems
- 6 dispensing signals with container empty input signal
- RS 232 interface module for communication slot optional

Detailed product information including technical data can be found in the Octopus brochure

+powerplus

A performance that offers more.

Size and performance

Perfect cleaning results and efficient solutions can only be achieved by utilising optimally coordinated process technology.

- Both the 80-litre washer-extractor drum and the 180-litre dryer drum offer ample space for an 8 kg load, as well as the right conditions for thorough, gentle and fast laundry care.
- A 1300 rpm final spin achieves a residual moisture content of only 49%
- 3 high-performance heater elements allow the suds to be heated up quickly and enable short programme running times
- With a heat output of 8 kWh, the dryer is the perfect supplement for fast laundry care.

+ecoplus

A sustainable, cost-effective performance.

Electricity or gas

It is more economical and better for the environment to use gas rather than electricity. With the high costs for electricity in comparison to gas, there is a great opportunity for savings in energy costs. The increased outlay for a gas-heated Miele tumble dryer is capitalised within a very short period of time.

There are also significant ecological benefits. Natural gas burns virtually particle-free, emitting far less CO₂. Compared with an electrically heated machine, carbon dioxide emissions are reduced by up to 50%. As natural gas is a prime source of energy, there are no conversion losses.

+brandplus

A strong brand.

Uncompromising quality, continuous product innovations, individual solutions, a wide range of services, and the proverbial long life-span stand for the Miele brand.

- High self-build content on all products
- Wide range of services including pre-sales advice, planning, training, economic feasibility studies, financing through to after-sales service
- Extensive quality tests
- Quality Made by Miele

The PW 6080 washer-extractors and the PT 7186 tumble dryers are available in 2 finishes:



Octopus washer-dryer stack and the dryer-dryer stack, load capacity 2 x 8 kg in the smallest space, Profitronic L Vario controls



New from
MIELE

Octopus washer-dryer stack PWT 6089 Vario Washer-extractor

- 8 kg load capacity
- Profitronic L Vario controls
- Honeycomb drum, 80 l capacity
- Spin speed 1300 rpm
- Direct-access keys
- g factor 520, residual moisture 49%
- Operating mode: Electric
- Drainage: Drain pump

WRAS
APPROVED
PRODUCT

Stacked with PT 7189 Tumble dryer

- Vented dryer
- Load capacity 8 kg
- Profitronic L Vario controls
- Honeycomb drum, 180 l capacity
- Direct-access keys
- Operating mode: Electric

Casing for washer-dryer stack

- Octoblue or stainless steel

New from
MIELE

Octopus dryer-dryer stack PTT 7189 Vario Tumble dryer

- Vented dryer
- Load capacity 8 kg per dryer
- Profitronic L Vario controls
- Honeycomb drum, 180 l capacity per dryer
- Direct-access keys
- Operating mode: Electric

Stacked with PT 7189 Tumble dryer

- Vented dryer
- Load capacity 8 kg
- Profitronic L Vario controls
- Honeycomb drum, 180 l capacity
- Direct-access keys
- Operating mode: Electric

Casing for dryer-dryer stack

- Octoblue

NOTE

Tower units are ordered and supplied as separate upper and lower components for on-site assembly.



+formplus

A concept that leaves a lasting impression.

The space-saving solution

Placing washing machines adjacent to tumble dryers poses a problem wherever space is limited or niches are extremely small in size. Here, with the new washer-dryer and dryer-dryer stacks from the Octoplus generation, Miele Professional is providing the ideal solution for approx. ½ m² of space.

A further advantage lies in the small dimensions of the 'compact laundry', which measures just 1920 mm in height, 692 mm in width and 763 mm in depth. These dimensions also mean that the appliances can be easily manoeuvred through narrow entrances.

+comfortplus

A simple, user-friendly solution.

Everything in view

In order to make operation of the washer-dryer and dryer-dryer stacks as comfortable as possible, the control elements are located in the centre. This means that they can be easily reached, and they provide the operator with the best possible view of the display information.

+powerplus

A performance that offers more.

Professional features

From short programme running times to flexible modes of operation, a high spin efficiency, a large range of programmes and connection options for metering pumps/payment systems, to large surface filters in the dryer; when it comes to performance and efficiency, a stack is in no way inferior to individual appliances. Furthermore, the washing machines in the stack are fitted with a drain pump for a flexible installation.



Octopus washing machine, load capacity 10 kg

SlimLine tumble dryer, load capacity 12 - 15 kg

Profitronic controls



PW 5105 Vario washer-extractor

- Load capacity 10 kg
- Profitronic L Vario controls
- Honeycomb drum, 100 l capacity
- Spin speed 1100 rpm
- Direct-access keys
- g factor 370, residual moisture 51%
- Operating mode: Electric

Casing

- Octoblu

Interfaces and connection options

- Optical interface for service diagnosis and programme updates
- 7-pole interface for payment systems
- 6 dispensing signals with container empty input signal
- RS 232 interface module for communication slot optional



PT 8303 SlimLine tumble dryer

- Vented dryer
- Load capacity 12 – 15 kg
- Profitronic B Plus controls, residual-moisture-controlled with 12 programmes
- Patented 'Perfect Dry' residual moisture system
- Galvanised drum, drum volume 300 l
- Operating mode: Electric or gas

Casing

- Octoblu front with Octoblu side panels or
- Octoblu front with galvanised panels (ideal for side-by-side installations)

Detailed information about PT 8303 as well as other SlimLine tumble dryers can be found in the brochure 'SlimLine – The new slim dryers from Miele'.



PW 5105 Vario washer-extractor

The best performance with maximal economy



+ecoplus

A sustainable, cost-effective performance.

Economical and environmental aspects

These new washer-extractors now take cost-efficiency and environmental concerns one step further.

- Up to 73% lower energy consumption*
- Up to 56% lower water consumption*

+volumeplus

A capacity that defines its size.

Water and detergent can only work to their full capabilities when there is sufficient space for the laundry.


- 100-litre drum volume for 10 kg laundry
- Reliable washing results
- Fewer textiles required due to quick renewed availability of the laundry
- Large drum opening for simple loading and unloading

+formplus

A concept that leaves a lasting impression.

With their compact dimensions, the PW 5105 washer-extractor and the PT 8303 SlimLine tumble dryer can be combined to form a perfect duo. The slim construction opens up whole new possibilities, especially in cases where the appliances are to be installed in locations with limited space.

- Slimline range for the perfect integration in confined spaces
- 100-litre drum volume in the smallest space
- Ergonomic product design for the ultimate in user convenience

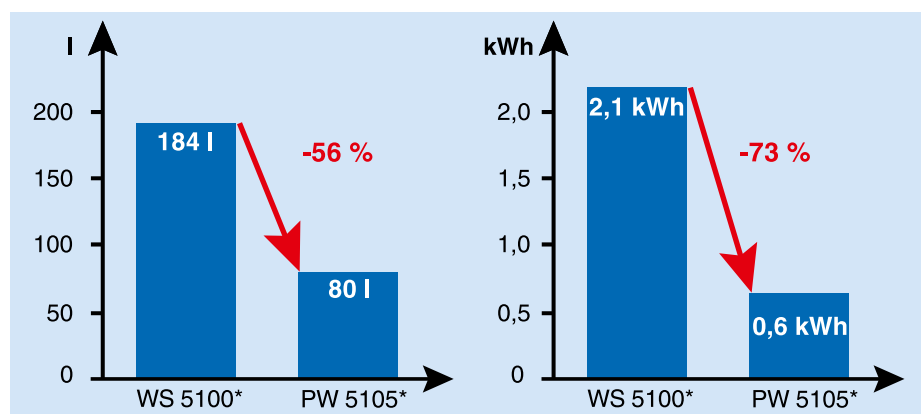

Water consumption/Wash cycle

Energy consumption/Wash cycle

* Comparison of Miele WS 5100 washer-extractor with Miele PW 5105 washer-extractor when using the Cottons 60°C programme, hot water connection

Miele flatwork ironers



Optimum laundry finish

Miele flatwork ironers are just the job for a perfect finish. Perfectly laundered textiles create a good impression, especially in cases where there is a high demand for a well-kept appearance.

Miele entry-line class

- Flush installation against a wall, infeed and outfeed from front
- Single-person operation
- Space-saving fold-away feature on HM 16-80

Powerful

- Laundry throughput max. 23 kg/h
- Initial residual moisture max. 25%
- Minimum aluminium trough heat-up time

Wide range of applications

- Simple ironing of serviettes, tea towels, table and bed linen, leisure and outer wear

Perfect ironing finish

- Temperatures adaptable to textiles
- High, uniform contact pressure
- Selectable roller speed
- Supple steel-wool padding
- Steaming function on HM 16-80

Excellent user convenience

- Ironing in seated position without having to use excessive force
- Clear, concise controls
- Treadle switch
- Easy to transport thanks to 4 castors (not including HM 21-100 / HM 21-140)
- Infeed board simplifies introduction of items
- Airing bar allows items to cool down without creasing

Miele quality

- Temperature-resistant ARAMID needle felt ironing cloth
- Roller bearings at both ends and two pedestals (not on HM 16-80)

Safety

- Automatic finger guard
- Emergency release

Ironing with steam

HM 16-80 rotary ironer

- Water tank with 0.83 l capacity
- Two-tank system for rapid provision of steam
- LED tank-empty indicator



HM 16-80 rotary ironer

- Roller diameter 160 mm
- Roller length 830 mm
- Throughput at 20% residual moisture max. 13 kg/h*
- Steam function
- Fold-away unit



HM 16-83 rotary ironer

- Roller diameter 160 mm
- Roller length 830 mm
- Throughput at 20% residual moisture max. 15 kg/h*
- Roller bearings on both sides



HM 21-100 flatwork ironer

- Roller diameter 210 mm
- Roller length 1002 mm
- Throughput at 25% residual moisture max. 14 kg/h*
- Throughput at 15% residual moisture max. 23 kg/h*

HM 21-140 flatwork ironer

- Roller diameter 210 mm
- Roller length 1395 mm
- Throughput at 25% residual moisture max. 27 kg/h*
- Connection for payment system

*Throughput according to DIN 11 902

Miele Co. Ltd.
Fairacres
Marcham Road, Abingdon
Oxon OX14 1TW
Tel 0845 330 3618
miele-professional@miele.co.uk

Miele worldwide:

AUSTRALIA
Miele Australia Pty. Ltd.
1 Gilbert Park Drive
Knoxfield, VIC, 3180
Tel. +613 97 64 71 30
Telefax +613 97 64 71 49

AUSTRIA
Miele Gesellschaft mbH.
Mielestraße 1
5071 Wals/Salzburg
Tel. +43 50 800-81 481
Telefax +43 50 800-81 429

BELGIUM
N.V. Miele S.A.
z.5 Mollem 480
Hof te Bollebeeklaan 9
1730 Mollem
Tel. +32 2451 14 11
Telefax +32 2451 14 14

CANADA
Miele Limited
161 Four Valley Drive
Vaughan, ON L4K 4V8
Tel. +1 905 660-9936
Telefax +1 904 532-2290

CHILE
Miele Ltda.
Nueva Costanera 4055
Vitacura
Santiago de Chile
Tel. +56 2 95700-00
Telefax +56 2 95700-79

CHINA
Miele China Beijing Office
3F South Tower, Kerry Center
No 1 Guang Hua Road
ChaoYang District
100020 Beijing PRC
Tel. +86 10 5783 2688
Telefax +86 10 5783 2600

Miele (Shanghai) Trading Ltd.
1-3 Floor, No. 82 Shi Men Yi Road,
Jing An District
200040 Shanghai PRC
Tel. +86 21 6135 3559
Telefax +86 21 6135 3993

CROATIA
Miele trgovina i servis d.o.o.
Buzinski prilaz 32
10000 Zagreb
Tel. +385/1/66 89 000
Telefax +385/1/66 89 090

CZECH REPUBLIC
Miele spol. s.r.o.
Holandská 4
63900 Brno
Tel. +420 5 4 35 53-1 11
Telefax +420 5 4 35 53-1 19

DENMARK
Miele A/S
2600 Glostrup, Erhvervsvej 2
Tel. +45 43 27 11 00
Tel. Salg/Professional
+45 43 27 15 00
Tel. Jylland +45 97 12 70 66
Telefax hovednr. +45 43 27 11 09
Telefax Salg/Professional
+45 43 27 15 09

ESTONIA
Miele OÜ
Tornimäe 5
10145 Tallinn
Tel. +372 6 55 68 11

FINLAND
Miele Oy
Porttikaari 6
01200 Vantaa
Tel. +3589 87 59 70
Telefax +3589 87 59 72 99

FRANCE
Miele S.A.S.
9 avenue Albert Einstein
93151-Le Blanc-Mesnil (Paris)
Tel. +33(0)1/49 39 34 44
Telefax +33(0)1/49 39 44 38

GERMANY
Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel. 0 180 220 21 21 (6 ct)*
Telefax 0 800 225 57 55
*Only in Germany

GREAT BRITAIN
Miele Co. Ltd.
Fairacres
Marcham Road, Abingdon
Oxon OX14 1TW
Tel. 0845 330 3618
Telefax 01235 405636

GREECE
Miele Hellas E.P.E.
Mesogion 257
154 51 N. Psychiko-Athens
Tel. national 01/10 6 79 44 44
international 00 30/2/10 6 79 44 44
Telefax 01/10 6 79 42 09
international 00 30/2/10 6 79 42 09

HUNGARY
Miele Kft.
Alsó Törökvész út 2.
1022 Budapest
Tel. +36 1 8806-400
Telefax +36 1 8806-402

HONG KONG
Miele (Hong Kong) Ltd.
41/F - 4101, Manhattan Place
23 Wang Tai Road,
Kowloon Bay
Tel. +852/2610 1331
Telefax +852/2610 1013

INDIA
Miele India Pvt. Ltd.
Ground Floor,
Copia Corporate Suites,
Plot No. 9, Jasola,
New Delhi - 110025
Tel. +91 (0)11 469000-00
Telefax +91 (0)11 469000-01

IRELAND
Miele Ireland Ltd.
2024 Bianconi Avenue
Citywest Business Campus
Dublin 24
Tel. +3531 461 07 10
Telefax +3531 461 07-97

ITALY
Miele Italia S.r.l.
Strada di Circonvallazione, 27
39057 S. Michele-Appiano (BZ)
Tel. +39 04 71/66 61 11
Telefax +39 04 71/66 63 50

JAPAN
Miele Japan Corp.
Meguro Yamate Place 9F
2-10-11 Meguro
Meguro-ku, Tokyo
153-0063 Japan
Tel. +81(3)5740-0034
Telefax +81(3)5740-0035

KAZAKHSTAN
Miele LLP
Building 1B (office 602)
Al-Farabi Pr. 13
050059 Almaty
Tel. +7 727 3111141
Telefax +7 727 3111042

KOREA
Miele Korea Limited
Miele House 8 fl.,
607-10 Yeoksam-dong
Gangnam-gu
Seoul 135-080
Tel. +82 2 3451 9353
Telefax +82 2 3451 9399

LATVIA
Miele SIA
Zaubes Str. 9A-38
1013 Riga
Tel. +371 67889877
Telefax +371 67889879

LITHUANIA
Miele Appliances UAB
S. Zukauskio g. 2/3-116
08240 Vilnius
Tel. +370 52487529
Telefax +370 52487529

LUXEMBOURG
Miele s.à r.l.
20, Rue Christophe Plantin
2339 Luxembourg
Tel. +352/4 97 11-25
Telefax +352/4 97 11-39

MALAYSIA
Miele Sdn Bhd
Suite 12-2, Level 12
Menara Kencana Petroleum
Solaris Dutamas
No. 1, Jalan Dutamas 1
Kuala Lumpur 50480
Tel. +603 6205 3899
Telefax +603 6205 3998

MEXICO
Miele S.A. de C.V.
Av. Santa Fé 170
German Centre 0-4-2
Col. Lomas de Santa Fé
C.P. 01210 México, D.F.
Tel. +52/55 85 03 98 70
Telefax +52/55 85 03 98 74

NETHERLANDS
Miele Nederland B.V.
De Limiet 2
4131 NR Vianen
Tel. +31 3 47/37 88 83
Telefax +31 3 47/37 84 29

NEW ZEALAND
Miele New Zealand Ltd.
Unit L, 10-20 Sylvia Park Road
Mt. Wellington, 1060 Auckland
Tel. +64 9573 1269
Telefax +64 9573 1268

NORWAY
Miele AS
Løxaveien 13
1351 Rud
Tel. +47/67 17 31 00
Telefax +47/67 17 31 10

POLAND
Miele Sp. z o. o.
ul. Gotarda 9
02-683 Warszawa
Tel. +48 22/5 48 40 00
Telefax +48 22/5 48 40 10

PORTUGAL
Miele Portuguesa, Lda.
Av. do Forte, 5
2790-073 Carnaxide
Tel. +351/21/42 48-100
Telefax +351/21/42 48-109

ROMANIA
Miele Appliances SRL
Intrarea Narciselor 8
Otopeni
Jud. Ilfov
Tel. +40 21 3520777
Telefax +40 21 3520776

RUSSIA
000 Miele CIS
Leningradsky Prospekt, 31A, bld. 1
125284 Moscow
Tel. +7 495 745-8992
Telefax +7 495 745-8680

SERBIA
Miele d.o.o. Beograd
Balkanska 2
Beograd - Stari Grad 11000
Tel. +381 11 2055060
Telefax +381 11 2055065

SINGAPORE
Miele Pte. Ltd.
163 Penang Road
#04-02/03 Winsland House II
Singapore 238463
Tel. +65/67 35 11 91
Telefax +65/67 35 11 61

SLOVAKIA
Miele s. r. o.
Plynárenská 1
82109 Bratislava
Tel. +421/2/58 10 31 11
Telefax +421/2/58 10 31 19

SLOVENIA
Miele d.o.o.
Brnčičeva ulica 41 g
1231 Ljubljana - Črnuče
Tel. +386 1563 44-80
Telefax +386 1563 44-90

SOUTH AFRICA
Miele (Pty) Ltd.
63 Peter Place
Bryanston 2194
Tel. +27(0)11/875-9000
Telefax +27(0)11/875-9035

SPAIN
Miele S.A.U.
Carretera de Fuencarral, 20
28108 Alcobendas (Madrid)
Tel. +34/91/6 23 20 00
Telefax +34/91/6 62 02 66

SWEDEN
Miele AB
Industrivägen 20
Box 1397
171 27 Solna
Tel. +46 85 62 29-000
Telefax +46 85 62 29-209

SWITZERLAND
Miele AG
Limmatstr. 4
8957 Spreitenbach
Tel. +4156 4 17 20 00
Telefax +4156 4 17-24 69

TURKEY
Miele Elektrikli Aletler
Diş. Tic. ve Paz. Ltd. Şti.
Güvercin Sokak No. 10
34330 Levent-Istanbul
Tel. +90/2 12/3 86-08 00
Telefax +90/2 12/3 25 84 49

UKRAINE
Miele LLC
Zhylyanskaya Str. 48, 50 A
01033 Kiev
Tel. +38 044 4960300
Telefax +38 044 4942285

UNITED ARAB EMIRATES
Miele Appliances Ltd.
Gold & Diamond Park
Sheikh Zayed Road
Building No. 6,
Offices No. 219
Dubai
Tel. +971 4 3418444
Telefax +971 4 1841852

USA
Miele, Inc.
9 Independence Way
Princeton, NJ 08540
Tel. 001-800/843 72 31
Telefax 001-609/419 42 41

OTHER COUNTRIES:
Sales International
Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel. +49(0)52 41-89 15 07
Telefax +49(0)52 41-89 15 00